

## H3W1F

www.honeywellvideo.com

### equip<sup>®</sup> SERIES 720p WIDE DYNAMIC TRUE DAY/NIGHT H.264 INDOOR MINIDOME IP CAMERA

Honeywell's latest addition to the equip<sup>®</sup> Series of IP-based products, the H3W1F, is a high definition, Wide Dynamic, True Day/Night indoor fixed minidome network camera engineered to provide extremely crisp images at minimal bandwidth. The H3W1F provides 720p resolution at full frame rate. Progressive scan technology and 2D edge enhancement provide outstanding clarity and definition. Digital Noise Reduction (DNR) results in significant storage savings without sacrificing image quality in low light. The 1/3" progressive scan CMOS sensor offers the latest in digital video surveillance technology with accurate color rendition through a wide variety of lighting conditions. The H3W1F also supports the ONVIF Profile S specification for interoperability between network video products.

The compact, one piece design provides fast and easy installation in any application. The camera comes complete with surface and flush mounting options (compatible with a 4S electrical box) and an optional wall/pendant mount kit is available.

In addition to the low light color performance, the camera will automatically switch to black and white. In this mode, lighting can be complemented with infrared for discreet/covert low light surveillance with exceptional monochrome images. In high contrast lighting conditions, the H3W1F delivers higher quality images and significantly better dynamic range (>100 dB) than conventional IP cameras. Designed for environments with difficult lighting, the H3W1F camera offers a unique solution to capture the whole picture regardless of lighting condition or application.

A 3D axis gimbal capable of 360° of pan, 180° of tilt and 360° of horizontal rotation simplifies mechanical camera adjustment. The varifocal auto iris lens allows the field of view to be adjusted to suit the scene requirements.

A powerful and intuitive web client allows fine tuning of the camera. This can also be performed from most NVR setup utilities.

The H3W1F supports dual video streams and multiple compression formats with frame rates up to 30 frames per second (25 fps for PAL systems). The compression parameters for the two video streams are independently configurable. The primary stream is dedicated to H.264. The secondary stream can be configured for H.264 or MJPEG. The H3W1F features analog video out for aiming and focusing during setup.

With built-in low current Power over Ethernet (IEEE 802.3af), power is supplied to the camera using standard network cabling, eliminating the need for a separate power supply and associated wiring. In situations where PoE support is not available, the unit can also be powered directly from 24 V AC.

#### Market Opportunities

The H3W1F is perfect for installations where excellent picture clarity at minimal bandwidth is required. At three times the resolution of standard analog cameras, yet with similar bandwidth requirements, the H3W1F can be retrofitted on many existing NVR installations without requiring additional storage.

#### Features

- Outstanding image quality, 720p (1280 × 720) resolution
- 30 fps (25 fps PAL) progressive scan
- True Day/Night, 3.3–12 mm VFAI lens with mechanical IR cut filter
- Dynamic Range: 115 dB
- Camera tamper detection
- Video motion detection
- Wall/pendant mount kit available
- NTP time synchronization support
- Dual digital video streams, independently configurable, H.264 and/or H.264/MJPEG
- Remote firmware update
- Supports both dynamic and static IP addresses
- Date/time stamp embedded into video stream
- Multiple browser support
- Single model for surface mount and recessed ceiling applications, 4S adapter plate also supplied
- Includes advanced IP locator software to make system setup easy
- Embedded web server for remote setup of camera video and network parameters
- Choice of 24 V AC or PoE IEEE 802.3af power inputs
- Supports input and output alarm contacts
- Supports bidirectional audio
- ONVIF Profile S support



HD

H3W1F shown with mounting ring for surface mount




HD

H3W1F shown without mounting ring for flush mount




## SPECIFICATIONS

Like all cameras in the equip® Series of IP-based products, the H3W1F network camera uses Honeywell technology for camera video motion detection, tamper detection, remote firmware updating and for secure storage of all camera settings. Video motion detection recognizes object motion within the field of view; then a simple on-screen notification alerts the user. Camera tamper detection notifies the user when a camera's field of view is altered, blinded or blurred. This ensures the video's integrity and alerts the customer to either a live event or a system problem that is causing disruption to the video stream. Honeywell's technology also allows users to remotely upload firmware to the camera. Setup is quick and easy and can be customized through a web client or from an NVR. The built-in web server provides password-protected access to the camera's video and network setup.

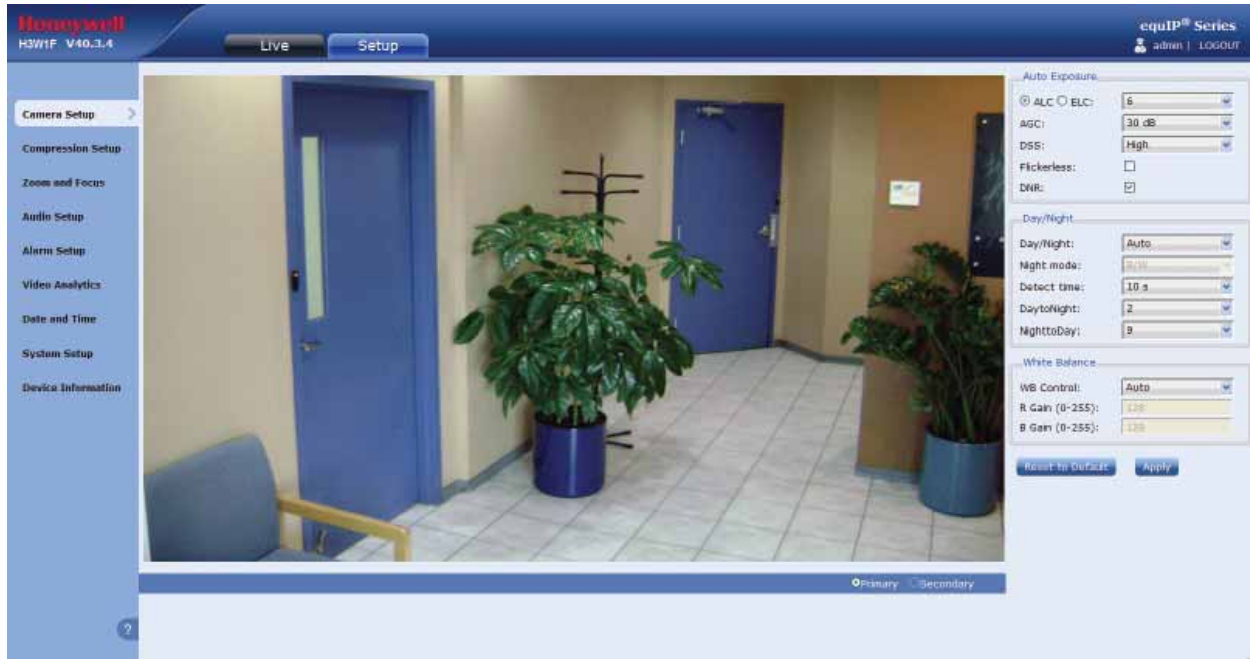

## System Diagram

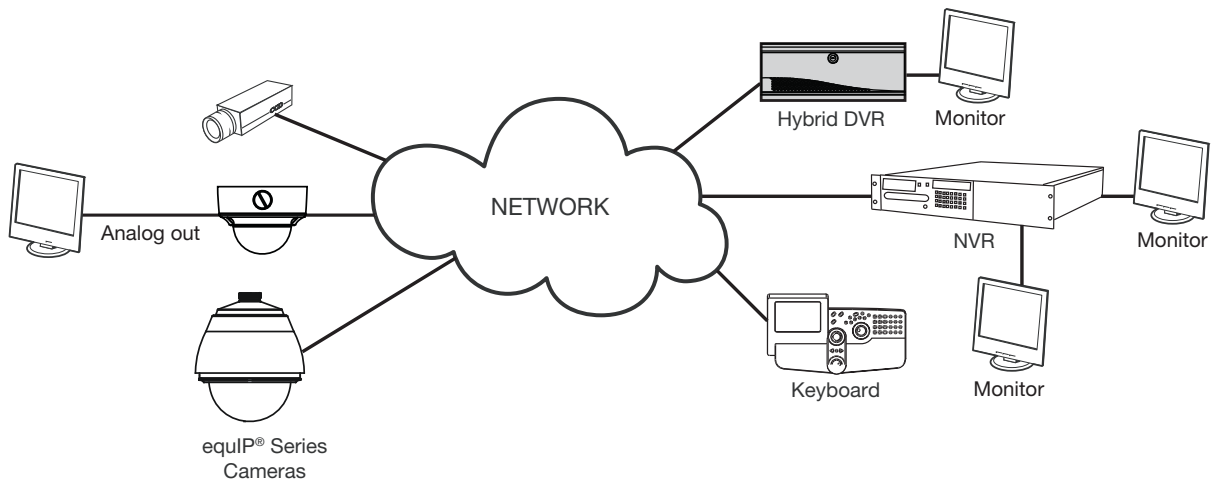


## SPECIFICATIONS

Operational				
Video Standard	NTSC/PAL			
Scanning System	Progressive scan			
Image Sensor	1/3" CMOS			
Number of Pixels (H×V)	1280 x 720			
Minimum Illumination	0.14 lux color/0.1 lux BW @ 50 IRE, F1.6			
Video Output (AUX)	1.0 Vp-p @ 75 ohms			
Dynamic Range	115 dB			
S/N Ratio	50 dB or more (AGC off)			
Auto Gain Control	Off/On, selectable (20-40 dB)			
Automatic Electronic Shutter	1/30-1/87,000 sec (NTSC and PAL)			
Lens Type	True Day/Night (TDN), 3.3-12 mm Varifocal Auto Iris, F1.6			
Angle of View		Wide	Tele	
	Horizontal	104.9°	26.8°	
	Vertical	52.5°	15.1°	
White Balance	Auto, Manual, WBC Push			
Audio/Two-Way	Line in/out			
Electrical				
Input Voltage	24 V AC, PoE IEEE 802.3af			
Input Range	17-28 V AC			
Surge Suppression	1.5 kW transient			
Power Consumption	5.0 W (max) 24 V AC PoE: PD Type 1, Class 2			
Mechanical				
Dimensions (W × H)	4.9" x 4.9" (125.1 mm x 124.2 mm)			
Weight	1.04 lb (0.47 kg) camera only			
Construction	Housing: Polycarbonate & Die cast aluminum Finish: Matte texture, off white			
Connector	Video Output: 2-pin Molex connector Power Input: Removable screw block Network: RJ45 connector Alarm I/O: Removable screw block Audio In: Removable screw block Audio Out: Removable screw block			
Environmental				
Temperature	Operating: 14°F to 122°F (-10°C to 50°C) Storage: -40°F to 158°F (-40°C to 70°C)			
Relative Humidity	0% to 85%, non-condensing			
IP Specifications				
Video Compression	Dual stream H.264 and/or H.264/MJPEG			
Primary Stream Resolution	Bitrate H.264 (Typical)*	Frame Rate	Storage/Day (GB)	
	1280 x 720	2.7 Mbps	30/25	28.48
	800 x 450	1.8 Mbps	30/25	18.98
	640 x 360	0.9 Mbps	30/25	9.49
320 x 180	0.315 Mbps	30/25	3.32	
Frame Rate NTSC/PAL	Up to 30/25 fps video in all resolutions			
Video Streaming	Dual streaming: H.264 and/or H.264/MJPEG Controllable frame rate and bandwidth Constant or variable bit rate			
Security	Multiple user access levels with password protection			
Video Access from Web Browser	Full control of all camera settings available to administrator			
Minimum Web Browsing Requirements	Pentium IV CPU 3.1 GHz or faster 1 GB RAM (32-bit) or 2 GB RAM (64-bit), Windows XP® SP3, Windows 2003 Server R2 (32-bit), Windows 7 (32-/64-bit), Windows Vista SP1, Windows 2008 R2 (64-bit), Internet Explorer 8 or 9 Mozilla Firefox® and Google Chrome			
Installation and Management Maintenance	Honeywell IP Utility software identifies the IP address, discovers cameras, supports firmware upgrades			
Supported Protocols	HTTP, TCP, RTSP, RTP, UDP, ARP, DNS, NTP, RTCP, FTP, ICMP, DHCP, Bonjour, IGMP, SSH			
Standards	ONVIF Profile S support			
Regulatory				
Emissions	FCC, CE (EN55022)			
Immunity	CE (EN50130-4)			
Safety	EU: EN60950-1 North America ETL listed to UL/CSA 60950-1			

\* Actual bitrate is scene and motion dependent with H.264 stream.

## SPECIFICATIONS

<b>System Integration</b>	<b>Accessories</b>	
<b>Open IP Integration</b>	<b>Housing and Mounts</b>	
ONVIF support and open API for software integration. Refer to <a href="http://www.onvif.org">www.onvif.org</a> for the ONVIF specification and the Honeywell Open Technology Alliance ( <a href="http://www.security.honeywell.com/hota">http://www.security.honeywell.com/hota</a> ) to learn more about our open and integrated solutions.	HD3-MK1	Wall/Pendant Mount Kit, Off White

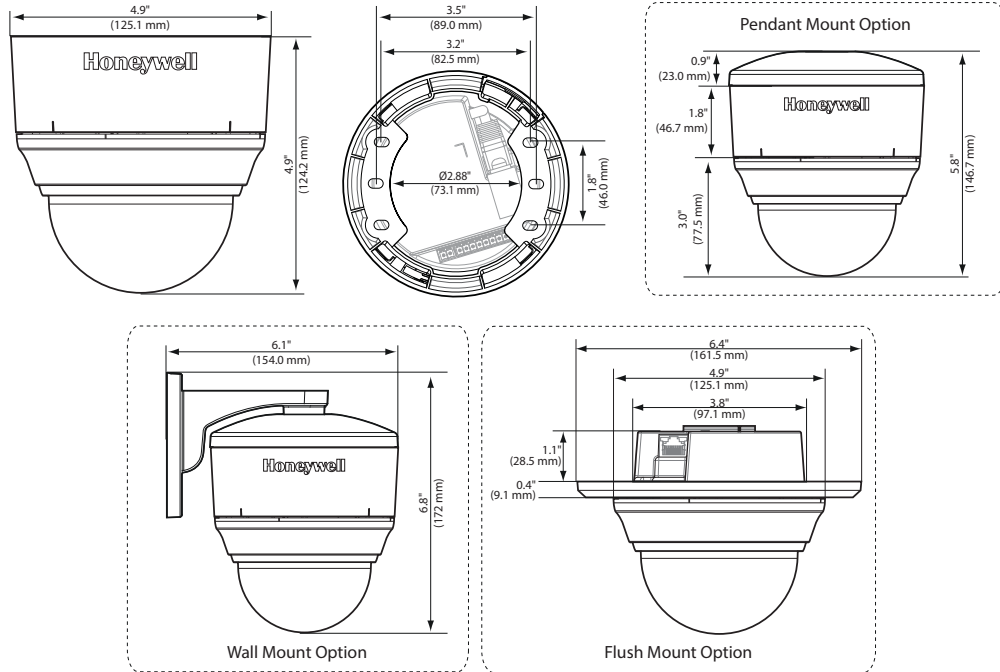

<b>Ordering</b>	
H3W1F1	Network TDN Indoor Fixed Minidome Camera, 1/3" Progressive Scan, CMOS, Wide Dynamic 720p Resolution, 3.3-12 mm VFAI Lens, 24 V AC or PoE IEEE 802.3af, H.264, NTSC
H3W1F1X	Network TDN Indoor Fixed Minidome Camera, 1/3" Progressive Scan, CMOS, Wide Dynamic 720p Resolution, 3.3-12 mm VFAI Lens, 24 V AC or PoE IEEE 802.3af, H.264, PAL

**NOTE:** Honeywell reserves the right, without notification, to make changes in product design or specifications.

**For more information:**  
[www.honeywell.com/security](http://www.honeywell.com/security)

**Automation and Control Solutions**  
 Honeywell Security Products Americas  
 2700 Blankenbaker Pkwy, Suite 150  
 Louisville, KY 40299  
 1.800.323.4576  
[www.honeywell.com](http://www.honeywell.com)

L/H3W1FD/D  
 July 2013  
 © 2013 Honeywell International Inc.

